


MLPC1-277L-V



- UL Type 2CA surge protectors for Led lighting
- Very compact,
- Plate mounting
- Screw terminal connection,
- Status indicator,
- End of life AC Disconnection
- EN 61643-11 compliance

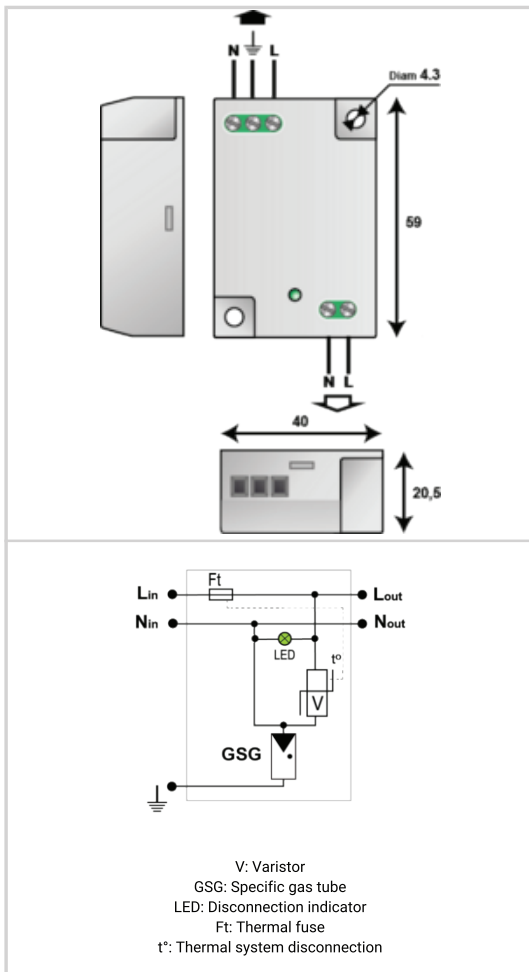

Electrical Characteristics		
SPD type		2 (or 3)
AC system		2W+G (Single Phase)
Nominal line voltage	AP	100 V-277 V
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	AQF	10 kV
Mechanical Characteristics		
Housing material		Thermoplastic UL94 V-0
Disconnection indicator		LED green OFF and AC network cut-off
Standards		
2HSULIFDULQP		UL Listed / IMQ / TUV
Part number		
831321		